

6-DZF-28



Applications

- › Electric vehicle
- › Electric wheelchair
- › Electric scooter
- › Electric play car for children
- › Garbage truck
- › Patrol car

Specification


Nominal Voltage	12V
Nominal Capacity	28Ah
Design life	5 years
Terminal	M5
Approx. Weight	Approx 8.0kg (17.6lbs)
Container Material	ABS
Rated Capacity	28.0Ah 20Hour Rate (1.40A to 10.5V)
	26.3Ah 10Hour Rate (2.63A to 10.5V)
	21.75Ah 3Hour Rate (7.25A to 10.5V)
	16.2Ah 1Hour Rate (16.2A to 10.5V)
Internal resistance	Full charged at 25°C: 14.0 mΩ
Max. Discharge Current	420A(5S)
Operating Temperature	Discharge: -20 ~50°C(-4~ 122°F)
	Charge: -20 ~50°C(-4~ 122°F)
	Storage: -20 ~50°C(-4~ 122°F)
	Float Use:13.7-13.9V@25°C
Charge Method (25 °C)	Cycle Use :14.7-14.9V,@25°C
	Max charge current 3.48A
Self discharge	3% of capacity declined per month at 25°C

General Features

- › High Corrosion Resistant Performance: Pb-Ca multi-alloy grid
- › High Energy Density and Power Density
- › Excellent Charge Acceptance Ability
- › Strong High and Low Temperature Performance
- › Optimized Capability of instant High-current Discharging
- › Low self-discharge rate



Dimension: 175(L)×166(W)×125(H)×125(TH) Unit: mm

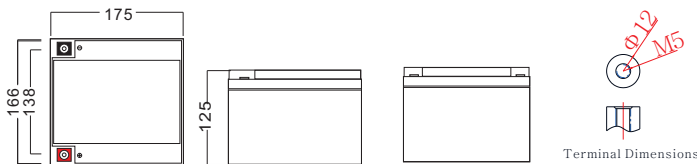

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)


FV/Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V	111	72.5	54.0	35.4	18.5	10.6	7.73	6.19	5.26	3.47	2.77	1.48
1.65V	110	69.4	49.6	33.6	17.4	10.2	7.50	5.99	5.15	3.42	2.74	1.46
1.70V	90.2	65.2	46.2	32.6	16.8	10.0	7.36	5.68	5.10	3.36	2.69	1.43
1.75V	83.7	62.2	43.1	31.8	16.2	9.72	7.25	5.60	4.87	3.28	2.63	1.40
1.80V	77.0	58.5	40.0	30.8	15.7	9.46	6.86	5.49	4.68	3.19	2.58	1.34

Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)


FV/Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V	208	131	98.9	59.8	33.9	19.8	14.6	11.7	9.94	6.55	5.37	2.94
1.65V	192	124	92.9	59.4	31.9	19.1	14.2	11.3	9.75	6.45	5.27	2.86
1.70V	175	120	88.7	59.2	30.9	18.7	14.0	10.8	9.47	6.39	5.23	2.84
1.75V	159	116	85.4	58.6	30.0	18.3	13.8	10.6	9.29	6.13	5.11	2.78
1.80V	143	112	81.7	58.2	29.6	18.2	13.4	10.5	9.05	5.92	5.00	2.76

6-DZF-28


Discharge characteristic

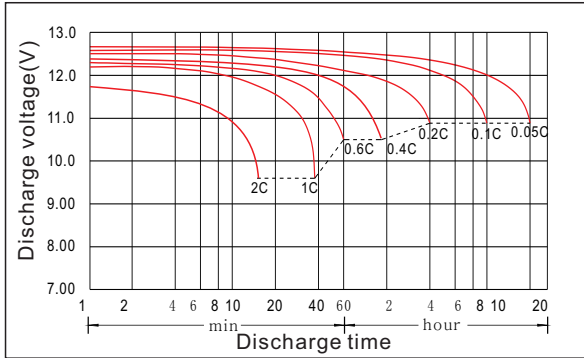


Charging characteristic

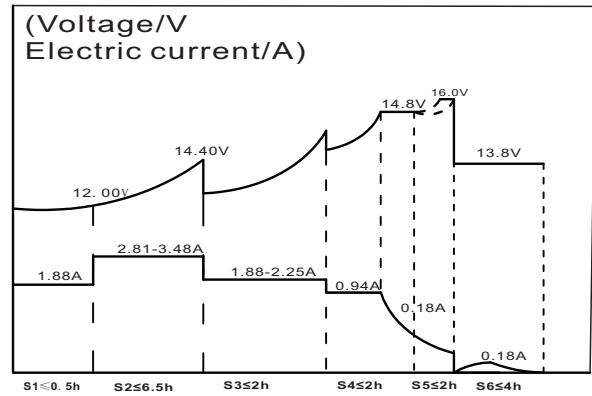


The effect of temperature on capacity

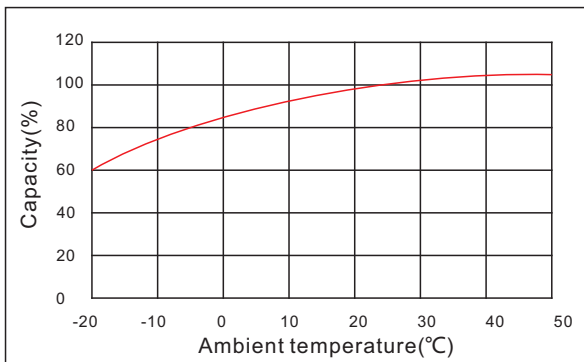


The effect of discharge depth on cycle life

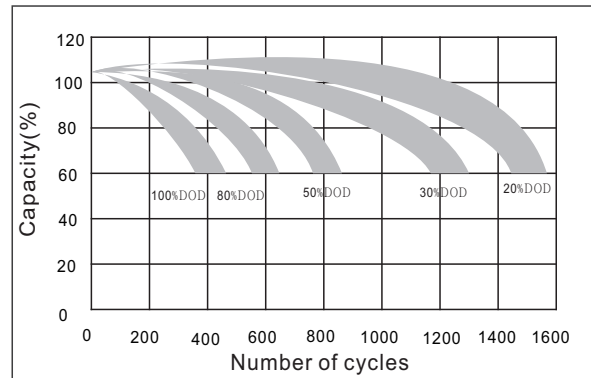

Curves of self-discharge

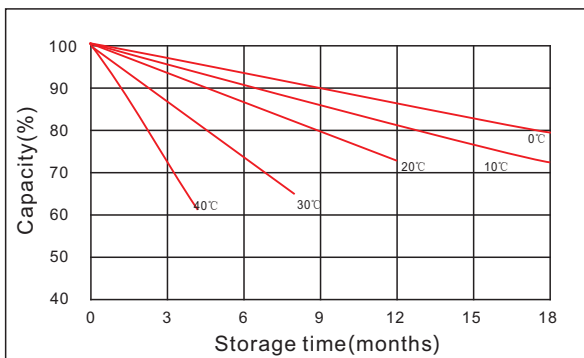

The effect of temperature on float life

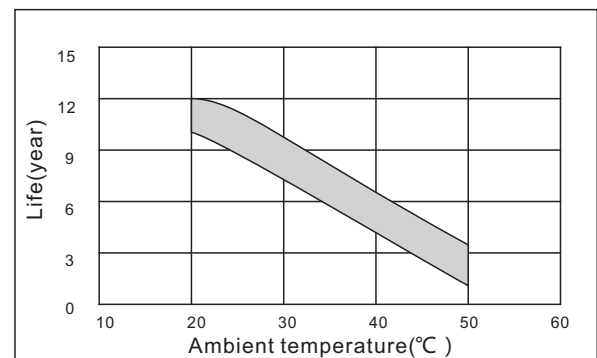

www.kijo.com.cn info@kijo.com.cn

Jiangxi Jingjiu Power Science&Technology Co. Ltd.
 Add: 1388 Fushan No.1 Street, Xiaolan Economic Development Zone, Nanchang City, Jiangxi Province, China.

+86-791-85982779 +86-791-85989842

Jiangxi Jingjiu Power (Jiujiang) Co. Ltd.
 Add: Xiwang Rd, Aicheng Industrial Park, Yongxiu Country, jiujiang City, Jiangxi Province, China.

