

# INDUSTRIAL BATTERIES



Whether you're cleaning windows on the side of a building or simply painting your ceiling, **DYNO** batteries provide maximum productivity with minimal downtime as it powers your industrial equipment. The sky isn't the limit when it comes to DYNO batteries. DYNO offers a premium range of USA made wet deep cycle industrial batteries that have been built to deliver dependable, reliable and superior power. With over 85 years in the battery industry, DYNO offers high performance power solutions to give you maximum uptime... all the time.

MODEL	VOLTS	WEIGHT	CAPACITY		RC (mins) 75 AH	TERMINAL	DIMENSIONS		
			C5	C20			L	W	H
<b>6V DEEP CYCLE</b>									
D105	6	27	185	225	105	MLP	262	179	276
D125	6	30	195	235	125	MLP	262	179	276
D145	6	33	215	245	145	ULP	262	179	302
D315	6	44	270	315	180	UT	305	178	356
D415	6	62	320	415	225	UT	314	181	419
<b>12V DEEP CYCLE</b>									
27M	12	24	83	100	200 @25AH	WING NUT	305	168	227
30HH	12	28	95	115	200 @25AH	UT	327	171	248
D185	12	53	147	185	90	UT	394	178	362

MODEL	REFERENCE	DESCRIPTION	VOLTS	CURRENT (Ah)
<b>DELTA-Q (QUIQ SERIES) SMART CHARGERS</b>				
912-2400	Q24-25	Delta-Q QuiQ 24V 25A Smart Charger	24	25
912-3600	Q36-21	Delta-Q QuiQ 36V 21A Smart Charger	36	21
912-4800	Q48-18	Delta-Q QuiQ 48V 18A Smart Charger	48	18
<b>DELTA-Q (IC650 BASE SERIES) INDUSTRIAL CHARGERS</b>				
940-001	IC650-24	Delta-Q IC650 24V 27.1A Industrial Charger	24	27.1
940-002	IC650-36	Delta-Q IC650 36V 18.1A Industrial Charger	36	18.1
940-003	IC650-48	Delta-Q IC650 48V 13.5A Industrial Charger	48	13.5
<b>DELTA-Q (IC900 BASE SERIES) INDUSTRIAL CHARGERS</b>				
942-001	IC900-24	Delta-Q IC900 24V 37.5A Industrial Charger	24	37.5
942-002	IC900-36	Delta-Q IC900 36V 25A Industrial Charger	36	25
942-003	IC900-48	Delta-Q IC900 48V 20A Industrial Charger	48	20
<b>DELTA-Q (IC1200 BASE SERIES) INDUSTRIAL CHARGERS</b>				
941-001	IC1200-24	Delta-Q IC1200 24V 50A Industrial Charger	24	50
941-002	IC1200-36	Delta-Q IC1200 36V 33A Industrial Charger	36	33
941-003	IC1200-48	Delta-Q IC1200 48V 25A Industrial Charger	48	25.5

**Delta-Q** Industrial battery chargers are durable chargers built for reliability and efficient charging performance. The optimized charge profiles for battery brands and types ensures improved battery life and performance. All Delta-Q battery chargers are IP66 sealed and tested to automotive standards for long service lives. The range of chargers is proven to extend battery life, provide maximum up-time and reduce the total cost of ownership.



[www.dcdownder.com.au](http://www.dcdownder.com.au)

## Discover®


Innovative Battery Solutions

**Discover** – The worlds leading OEM traction battery supplier.

Discover maintenance-free **Traction** batteries utilise true traction plate technology to provide superior constant power performance at high operating voltages reducing electric component and motor fatigue.

**Dry Cell Traction** batteries are constructed to deliver excellent run times and very good cycle life in hard, high rate and deep cycle applications.

**Gel Cell Traction** batteries provide excellent cycle life and good run times in tough deep cycle use with regular discharges.

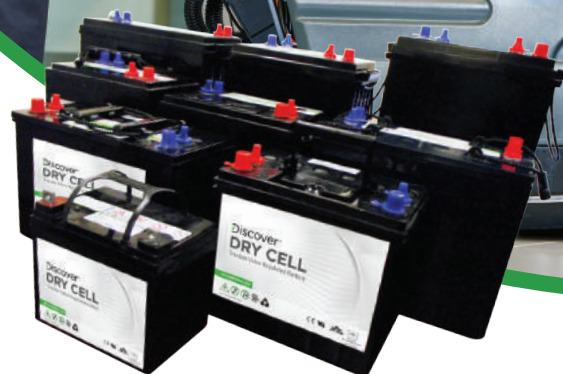

MODEL	TERMINAL	VOLTS	CAPACITY		DIMENSIONS			TH	WEIGHT (KGS)
			C5	C20	L	W	H		
<b>EV TRACTION DRY CELL</b>									
<b>6 VOLT</b>									
EVGC6A-A	AM	6	190	220	260	180	254	274	30.0
EVGT6A-A	AM	6	222	260	260	180	268	282	36.0
EV305A-A	AM	6	285	330	295	180	345	365	48.5
EVL16A-A	M10	6	335	390	295	180	383	385	55.0
<b>12 VOLT</b>									
EV27A-A	M8	12	87	100	308	172	212	232	29.1
EV31A-A	AM	12	96	115	330	172	216	236	32.5
EV12A-A	AM	12	120	140	327	180	254	274	39.5
EV185A-A	AM	12	198	230	386	178	352	372	63.0
<b>EV TRACTION GEL CELL</b>									
<b>6 VOLT</b>									
EV506G-170*	F10-M8	6	167	196	260	180	254	256	29.0
EV506G-180*	F10-M8	6	180	205	244	189	271	271	31.0
EV506G-250*	F10-M8	6	250	285	293	180	343	345	45.0
<b>12 VOLT</b>									
EV512G-072*	F10-M8	12	72	90	308	172	212	232	29.1
EV512G-076	F10-M8	12	76	86	330	172	231	231	29
EV512G-080	F10-M8	12	80	90	330	172	231	231	29
EV512G-103	F10-M8	12	103	115	327	180	274	274	36

