

## JPC12-45



### Applications


- > Solar/ wind energy and other new energy storage
- > Hybrid vehicles, electric bicycles and other new energy vehicles
- > Other backup or cycle purposes

### General Features

- > Lead-carbon composite negative plate, both capacitance and battery characteristics
- > Long cycle life, excellent deep cycle discharge ability
- > Excellent charge acceptance ability
- > Optimized capability of instant high-current discharging
- > Strong high and low temperature performance
- > Precision sealing technology



Dimension: 197(L)×165(W)×172(H)×172(TH) Unit: mm

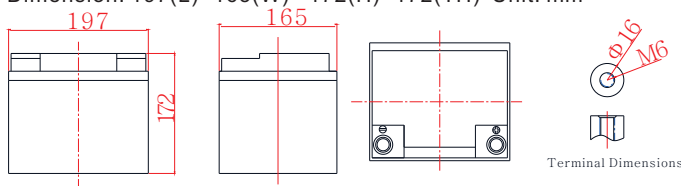

### Specification

Nominal Voltage	12V
Nominal Capacity	45Ah
Design life	15 years
Terminal	M6
Approx. Weight	Approx 15.0kg (33.1lbs)
Container Material	ABS
Rated Capacity	45.0Ah → 10Hour Rate (4.50A to 10.8V)
	35.4Ah → 3Hour Rate (11.8A to 10.8V)
	28.9Ah → 1Hour Rate (28.9A to 10.5V)
Internal resistance	Full charged at 25°C: 8.20 mΩ
Max. Discharge Current	540A(5S)
Operating Temperature	Discharge: -20 ~60°C (-4 ~ 140°F)
	Charge: -20 ~50°C (-4 ~ 122°F)
	Storage: -20 ~50°C (-4 ~ 122°F)
Charge current:	Max. 13.5A ; Recom.4.50~9.00A
Charge Method (25 °C)	Standby Use:Initial Charging Current Less than 13.5A Voltage 13.6-13.8V
	Cycle Use :Initial Charging Current Less than 13.5A Voltage 14.4-14.9V
Self discharge	3% of capacity declined per month at 25°C

### Constant Current Discharge Characteristics Unit: A (25°C, 77°F)


FV/Time	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	82.6	50.3	29.7	17.0	12.4	8.30	5.45	4.66	2.45
1.65V	80.1	49.4	29.5	16.9	12.2	8.21	5.40	4.61	2.44
1.70V	78.4	48.6	29.3	16.8	12.1	8.12	5.36	4.57	2.43
1.75V	75.8	48.1	28.9	16.6	11.9	8.04	5.32	4.52	2.42
1.80V	70.7	46.0	28.1	16.2	11.8	7.82	5.27	4.50	2.40
1.85V	63.1	42.0	26.1	15.4	11.2	7.43	5.05	4.34	2.36

### Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)


FV/Time	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	146	91	56.1	32.2	23.5	15.7	10.6	8.96	4.85
1.65V	143	90	55.7	32.1	23.2	15.6	10.5	8.87	4.83
1.70V	141	90	55.3	32.0	23.1	15.5	10.5	8.78	4.81
1.75V	140	90	54.8	31.8	22.9	15.4	10.4	8.69	4.78
1.80V	133	88	54.4	31.7	22.9	15.3	10.3	8.60	4.76
1.85V	119	80	50.5	30.3	21.7	14.6	9.90	8.46	4.72

# JPC12-45


Discharge characteristic

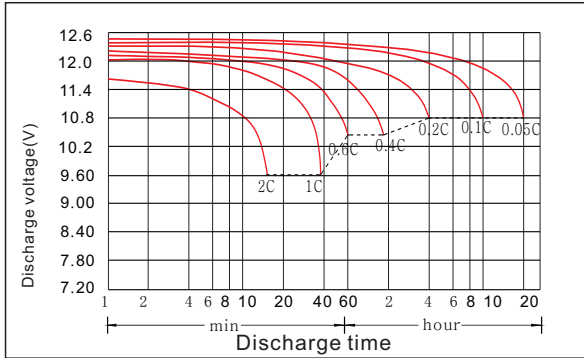


Charging characteristic

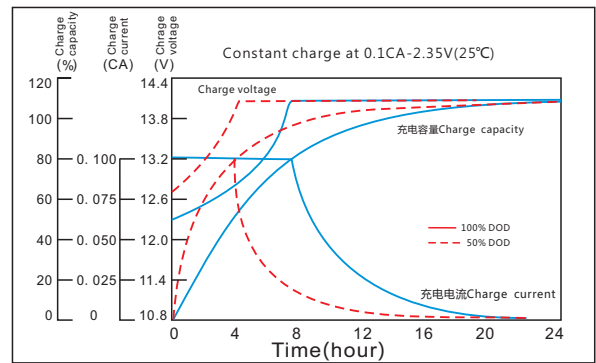


The effect of temperature on capacity

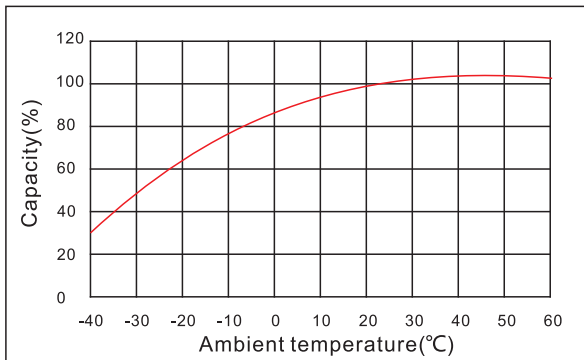


The effect of discharge depth on cycle life

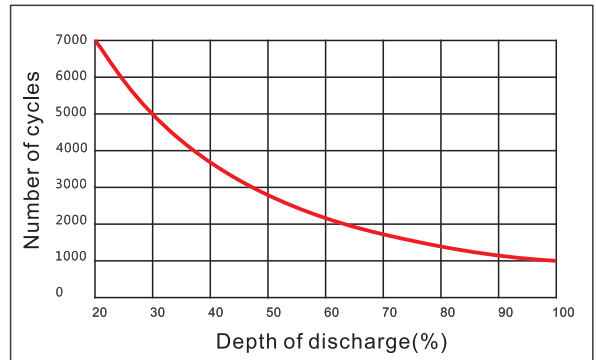

Curves of self-discharge

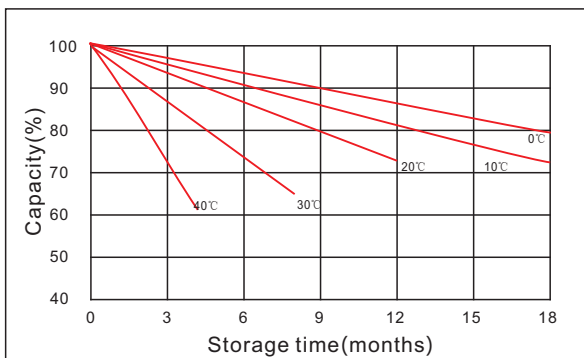

The effect of discharge depth on cycle life

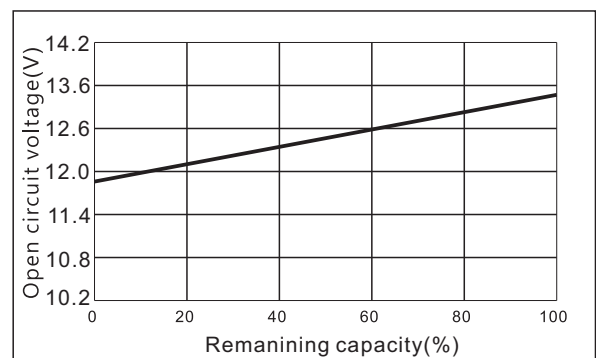

[www.kijo.com.cn](http://www.kijo.com.cn)    [info@kijo.com.cn](mailto:info@kijo.com.cn)

**Jiangxi Jingjiu Power Science&Technology Co. Ltd.**  
Add: 1388 Fushan No.1 Street, Xiaolan Economic Development Zone, Nanchang City, Jiangxi Province, China.

+86-791-85982779    +86-791-85989842

**Jiangxi Jingjiu Power ( Jiujiang) Co. Ltd.**  
Add: Xiwang Rd, Aicheng Industrial Park, Yongxiu Country, Jiujiang City, Jiangxi Province, China.

