


MODEL **SAGM 06 220**  
 VOLTAGE **6V**  
 CAPACITY **220Ah @ 20Hr**  
 MATERIAL **Polypropylene**  
 BATTERY **VRLA AGM / Non-Spillable / Maintenance-Free**  
 COLOR **Maroon**  
 WATERING **No Watering Required**   
 IEC 61427 **8+ Years Life**



**6V**

**PRODUCT + PHYSICAL SPECIFICATIONS**

Model	Terminal Type <sup>D</sup>	Dimensions <sup>B</sup> Inches (mm)			Weight Lbs. <sup>F</sup> (kg)	Handles	Installation Orientation
		Length	Width	Height			
SAGM 06 220	M8/LT	10.30 (262)	7.06 (179)	10.73 (273)	68 (31)	Embedded	Horizontal and Vertical

**ELECTRICAL SPECIFICATIONS**

Voltage	Capacity <sup>A</sup> Amp-Hours (Ah)					Energy kWh	Internal Resistance (mΩ)	Short Circuit Current (A)
	10-Hr	20-Hr	48-Hr	72-Hr	100-Hr			
6V	190	220	228	231	235	1.32	1.9	3250

**CHARGING INSTRUCTIONS**

Charger Voltage Settings (at 77°F/25°C)							
System Voltage	6V	8V	12V	24V	36V	48V	
<b>Bulk</b>	20% of C <sub>20</sub>						
<b>Absorption Charge (2.40 VPC)</b>	7.20	9.60	14.40	28.80	43.20	57.60	
<b>Float Charge (2.25 VPC)</b>	6.75	9.00	13.50	27.00	40.50	54.00	

Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.

**CHARGING TEMPERATURE COMPENSATION**

Add	Subtract
0.005 volt per cell for every 1°C below 25°C 0.0028 volt per cell for every 1°F below 77°F	0.005 volt per cell for every 1°C above 25°C 0.0028 volt per cell for every 1°F above 77°F

**STATE OF CHARGE MEASURE OF OPEN-CIRCUIT VOLTAGE**


Percentage Charge	Cell	6 Volt
100	2.14	6.42
75	2.09	6.27
50	2.04	6.12
25	1.99	5.97
0	1.94	5.82

**OPERATIONAL DATA**


Operating Temperature	Self Discharge
-4°F to 122°F (-20°C to 50°C) At temperatures below 32°F (0°C) maintain a state of charge greater than 60%	Less than 3% per month depending on storage temperature conditions




Designed in compliance with applicable BCI, DIN, BS and IEC standards. Tested in compliance to BCI and IEC standards.




## SOLAR CYCLE-LIFE

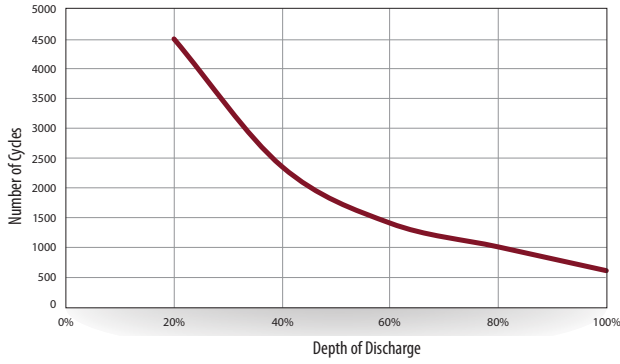


## CAPACITY VS. OPERATING TEMPERATURE

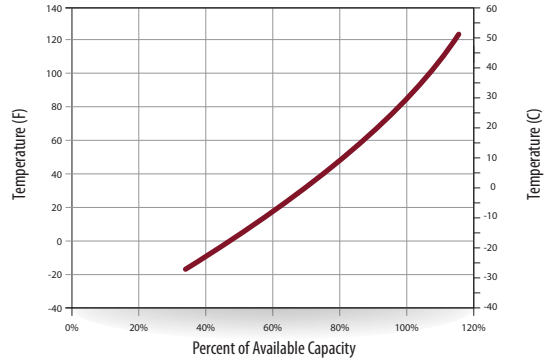

## SELF DISCHARGE VS. TIME<sup>E</sup>



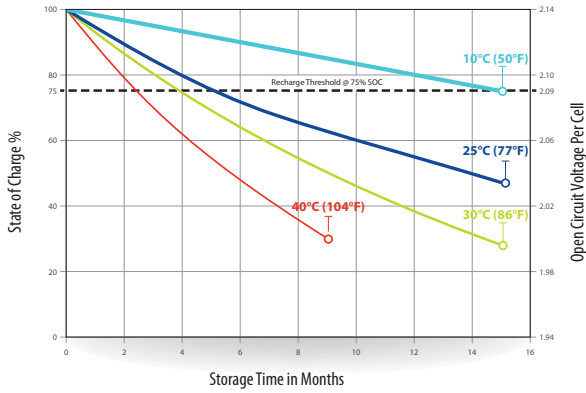


## TROJAN SAGM 06 220 PERFORMANCE

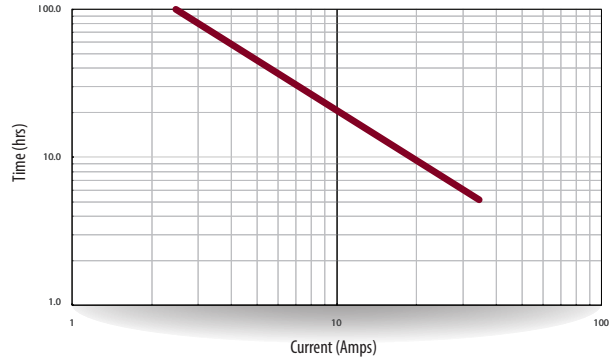


## BATTERY DIMENSIONS

Dimensions Inches (mm) - shown with M8, height is 12.07 with LT

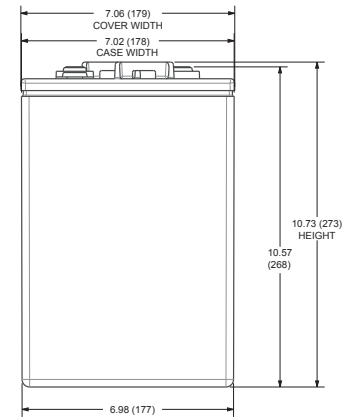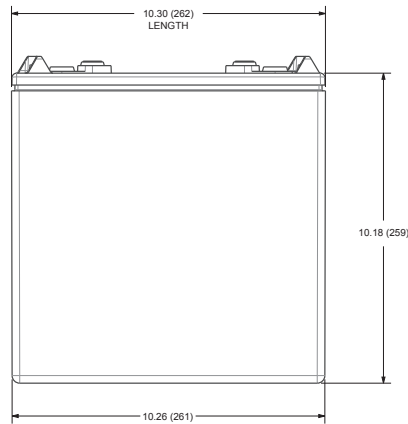

## TERMINAL CONFIGURATIONS<sup>D</sup>

M8



**Battery Height with Terminal in Inches (mm)**  
10.57 (268)

**Torque Values: in-lb (Nm)**  
Bolt: 85 – 90 (10 – 11)

M8 with LT Adapter (adapter provided but not installed)



**Battery Height with Terminal in Inches (mm)**  
12.07 (307)

**Torque Values: in-lb (Nm)**  
Connection to M8: 85 – 90 (10-11)  
Connection to LT: 65 – 75 (7.5 – 8.5)

**Bolt Size**  
M8 x 1.25

A. The amount of amp-hours (Ah) a battery can deliver when discharged at a constant rate at 86°F (30°C) for all rates and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.  
B. Dimensions may vary depending on type of handle or terminal. Batteries should be mounted with 0.5 inches (12.7 mm) spacing minimum.

C. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.  
D. Terminal images are representative only.  
E. A boost charge should be performed every 6 months when batteries are in storage.  
F. Weight may vary.